
LINOTYPE IMPROVEMENT INFORMATION SHEET

NO. 266

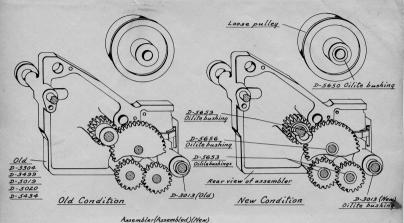

D-3304 Model 5B-8B D-3499 Model 8c-14B.5.k-/4C-21B-22B.5.k D-5019 Model 8BB-25B-29(2)(90)-29(4)(90)-31(4)(90)

2-301 3 mage: 0.ad -6.38 -6.3[c](30) -6.3[4](30) -3 (4)[4](30) -3.520 Magel 80c -1484 -40 -2.25 (6.86 -8.6 -2.7.6.8.2.9[2](72)-29(2)(72-90)-29(4)(72)
29(4)[72-90]-30(2)[72]-30(2)[72-90]-30(4)[72)-30(4)[72-90]
30(4)[30]-31(4)[72-90]-32(4)[72-90]-32(4)(90)-33(72)
2-5434 Fast speed, small star.

ASSEMBLER (ASSEMBLED) PROVIDED WITH OILITE BEARINGS

Oilite bearings have been added at the various places on the assembler which have heretofore required manual lubrication. This will eliminate the necessity of oiling, thus preventing the possibility of oil coming in contact with the assembler driving belt or matrices.

APPLIED IN FACTORY TO MODELS

All new Models of 29-30-31-32-33 and Supplemental Models 5-8-14-25-26.

OUTSTANDING MODELS

Can be applied to outstanding models by substituting new assembler (assembled) as part number designates.

First applied to Model 29(4)(72-90), Serial #53428.

MERGENTHALER LINOTYPE COMPANY, Brooklyn, N.Y.

September 19, 1939