


MORE AUTOMATION

T
E
L
E
T
Y
P
E
S
E
T
T
E
R

ANNOUNCING A NEW feature that will automatically stop the Teletypesetter Operating Unit from a signal in the tape.

When a preselected code combination is sensed in the tape by the Operating Unit, the Operating Unit will automatically stop and light a signal lamp, indicating that the Operating Unit was purposely stopped. The depression of a push button included in this set of parts will automatically re-start tape operation.

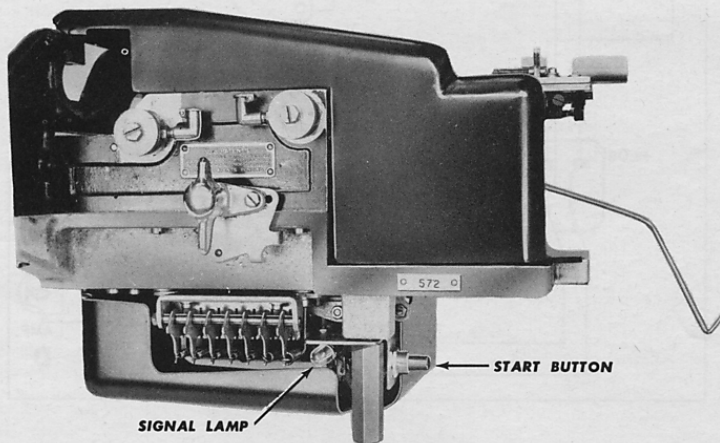


This new feature provides means for stopping the Operating Unit to:

- a** insert "PI" characters
- b** change linecasting machine magazines
- c** make necessary linecasting machine changes for varied composition
- d** recast repeated lines

This set of parts (No. 132228) can be installed on any Teletypesetter Operating Unit equipped with contact code lever and clutch magnet assemblies, or it may be furnished with a new Operating Unit upon request.

CANADIAN LINOTYPE, LIMITED
675 KING ST. W. TORONTO

METHOD OF OPERATION:

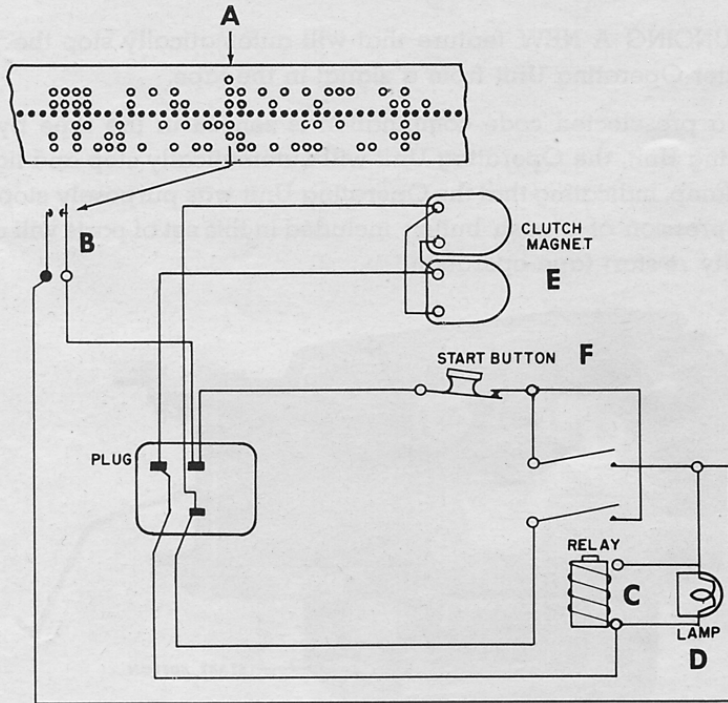

A code combination (A) in the tape actuates one of the contact code levers (B) closing a contact that energizes a relay (C) and lights the signal lamp (D). Simultaneously the clutch magnet (E) is automatically operated, stopping the Operating Unit.

An attendant may, after inserting "PI" characters or making the necessary changes as to line length, type size, mold and ejector settings, etc. restart the Operating Unit by merely depressing the "Start" button (F) which releases the clutch magnet and at the same time turns off the signal lamp.

TELETYPESETTER

C O R P O R A T I O N
2752 NORTH CLYBOURN AVENUE, CHICAGO 14, ILLINOIS