

LINOTYPE IMPROVEMENT INFORMATION SHEET


NO. 255



E-3850 (30-36Em) (Old)

E-3851 (42Em) (Old)

Old Condition

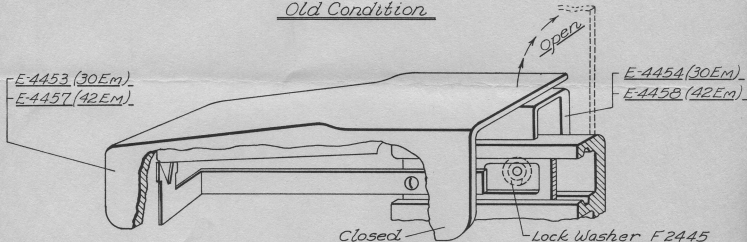

E-4453 (30Em)

E-4457 (42Em)

E-4454 (30Em)

E-4458 (42Em)

Closed

Lock Washer F2445

First Elevator Jaw Line Stop Transfer Rod Guard (Assembled) (New)

E-4456 (30-36Em)

E-4459 (42Em)

New Condition

FIRST ELEVATOR JAW LINE STOP TRANSFER ROD GUARD

An improved two piece construction First Elevator Jaw Line Stop Transfer Rod Guard (Assembled) has been designed. The outer part is hinged to the inner or supporting part which permits it to be lifted up and out of the way for convenient access to the transfer rod. This improvement eliminates the possibility of accident or breakage of the transfer rod.

APPLIED IN FACTORY TO MODELS

All new models of 28-29-30-31-32-33 Series, with or without Self Quadder.

OUTSTANDING MODELS

Can be applied to outstanding 30-36 em machines equipped with First Elevator Jaw Line Stop Transfer Rod, with or without Self Quadder, by substituting one E-4456 and two each of F-2445. For 42 em machines, equipped with First Elevator Jaw Line Stop Transfer Rod, with or without Self Quadder, substitute one E-4459 and two each of F-2445. The same screws which fasten the old guard are used.

First applied to Model 32(3)(90), Serial #53323.

MERGENTHALER LINOTYPE COMPANY, Brooklyn, N.Y.